


Avionics Standard Communications Bus Monitor Card

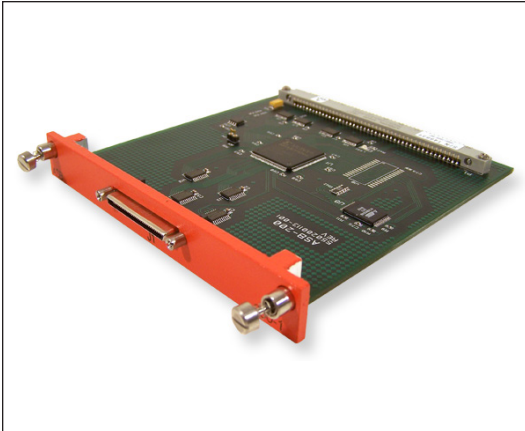

Applications

- Avionics bus monitoring
- ASCB message storage
- ASCB message display

Features

- Interface with PTI-2000 Telemetry Interface System
- Acquires ASCB Rev D avionics data
- Each data word includes 32-bits of data, 4 flag bits and 28 time-bits
- ASCB Rev D data is retrieved into the PCM under format control
- Message words are selectable for Class I PCM Transmission
- Multiple cards in a single chassis
- Windows software included

Description

The ASB-200 card serves as a bus monitor for messages being transmitted on the Avionics Standard Communications Bus (ASCB) Version D. The ASB-200 communicates to the ASCB bus through the PTI-2000 Telemetry Interface System. All messages are stored in the PTI-2000 and retrieved under format control by this card.

Revision 05/11/2015

ASB-200 Datasheet

©2015 Teletronics - A Curtiss-Wright Company
Specifications subject to change without notice.

Approved for Public Release 15-S-2193

Teletronics - A Curtiss-Wright Company

15 Terry Drive, Newtown, PA 18940

phone: 267.352.2020 fax: 267.352.2021 Sales@ttcdas.com

www.ttcdas.com



CAIS
Compatible



Management
System
AS9100C
ISO 9001:2008