


20-Channel Differential Analog Multiplexer Card

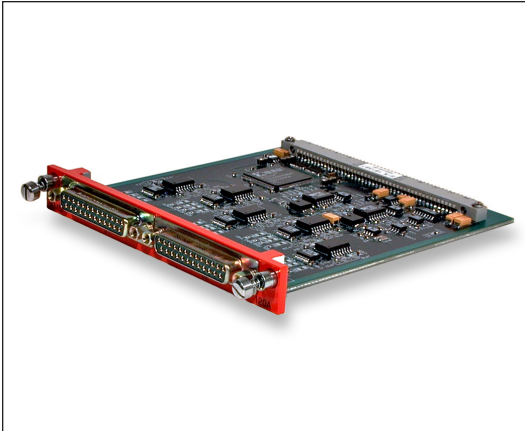

Features

- Differential analog multiplexer card
- 20 channels per card
- Per-channel, factory set attenuation
- Per-channel, factory set channel gain
- Programmable overhead gain and offset
- Programmable constant voltage excitation
- 2 sources per card
- Zero and voltage substitution calibration
- >1,000 MOhms input impedance (power on)
- $\pm 0.5\%$ system accuracy
- Windows software included

Description

The AMD-120A is a 20 channel differential analog multiplexer card for use in TTC's EDAU-20XX or CDAU-20XX series products. The card accepts voltages from various system sources including sensors, transducers, batteries, and other pre-conditioned analog voltages. These signals are encoded into data words for transmission in the system PCM output format. Each card also provides two (2) constant voltage excitation outputs, each of which are independently programmable to +10 VDC or +5 VDC. Each excitation output provides up to 160 mA and can be shared among multiple sensors/transducers.

Applications

- Flight test instrumentation
- Factory automation and process control
- Measurement of pre-conditioned analog signals, battery voltages, ...
- Research measurements and experiments

Revision 05/28/2010

AMD-120A Datasheet

©2010 Teletronics - A Curtiss-Wright Company
Specifications subject to change without notice.

Approved for Public Release 13-S-2856



CAIS
Compatible



Management
System
AS9100C
ISO 9001:2008

Teletronics - A Curtiss-Wright Company
15 Terry Drive, Newtown, PA 18940
phone: 267.352.2020 fax: 267.352.2021 Sales@ttcdas.com

www.ttcdas.com