


## 8-Channel ARINC-429 Bus Monitor Card

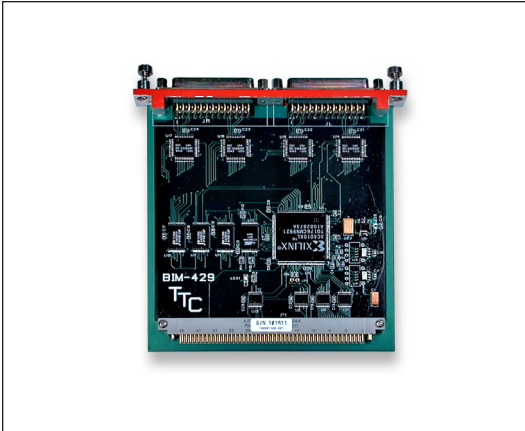

### Applications

- Commercial aircraft instrumentation
- Avionics
- Lab test

### Features

- 8-channel ARINC-429 bus monitor card
- EDAU-2000 and CDAU-2000 compatible
- Supports up to 256 labels per bus
- Timestamps the receipt of a valid word
  - Supports high, low and micro timestamp
- Operates in the “listen mode”
- Programmable “high” or “low” speed (2-channel basis)
- Programmable data storage based on data labels and SDI bits
- IRIG 101-96 Chapter 8
  - 100% of all ARIC data output
  - Uses CPM-112 card in the unit
- Microsoft Windows application software included

### Description

The BIM-429-8 is an 8-channel ARINC-429 bus monitor card for use in TTC's EDAU/CDAU-20XX series products. The card receives data from up to eight (8) standard avionics ARINC-429 serial digital data buses. The incoming data rate is programmable on a 2-channel basis at either 12.5 kHz (lo speed) or 100 kHz (hi speed). High time, low time, and micro timestamping are available on a per-word basis. All incoming ARINC-429 data is stored on the card and is programmable by the user for insertion in the PCM output format as “Class I PCM” (standard fixed-position). In addition the card provides 100% of the ARINC data through the CPM-112 card.

Revision 05/12/2015

### BIM-429-8 Datasheet

©2015 Teletronics - A Curtiss-Wright Company  
Specifications subject to change without notice.

Approved for Public Release 15-S-2255



CAIS  
Compatible



Management  
System  
AS9100C  
ISO 9001:2008

Teletronics - A Curtiss-Wright Company  
15 Terry Drive, Newtown, PA 18940  
phone: 267.352.2020 fax: 267.352.2021 Sales@ttcdas.com

**www.ttcdas.com**