


Dual Redundant MIL-STD-1553 Bus Monitor

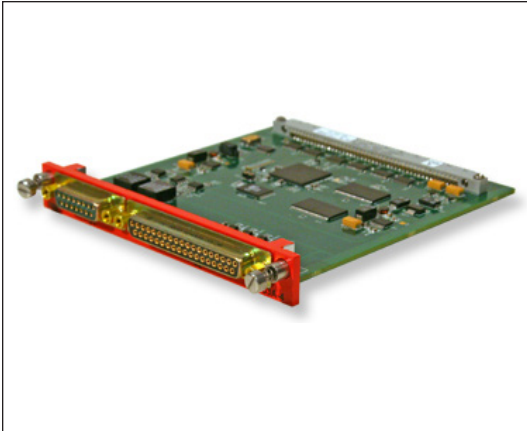

Applications

- MIL-STD-1553 instrumentation
- Avionics bus monitoring
- Lab test

Features

- MIL-STD-1553 bus monitor card
 - One dual-redundant input channel
 - Supports 1553 A/B and MACAIR
 - Direct or transformer coupling
- IRIG 106-96, Chapter 4 (selected data)
 - Selected data from pre-programmed message trigger list
 - Selected data from local bulk message storage
 - All incoming data (FIFO based) per IRIG 106 Chapter 8 within Chapter 4
- Timestamp on a per message basis
 - High, low and micro time
- Multiple cards in a single unit
- Configurable to operate with analog conditioning cards in the same unit
- Microsoft Windows application software included

Description

The BIM-553A-4 is a dual-redundant MIL-STD-1553 bus monitor module for use in TTC's EDAU/CDAU-2000 series products. The module supports either direct or transformer coupling under user-program control. High time, low time, and micro timestamping are provided on a per-message basis. All incoming MIL-STD-1553 messages are temporarily buffered on the module and can be selected by the user for transmission in the PCM output format as "Class I PCM" (standard fixed-position), and as "Class II PCM".

Revision 05/11/2015

BIM-553A-4 Datasheet

©2015 Teletronics - A Curtiss-Wright Company
Specifications subject to change without notice.

Approved for Public Release 15-S-2260



CAIS
Compatible



Management
System
AS9100C
ISO 9001:2008

Teletronics - A Curtiss-Wright Company
15 Terry Drive, Newtown, PA 18940
phone: 267.352.2020 fax: 267.352.2021 Sales@ttcdas.com

www.ttcdas.com