


2-Channel Programmable Secondary Output Module

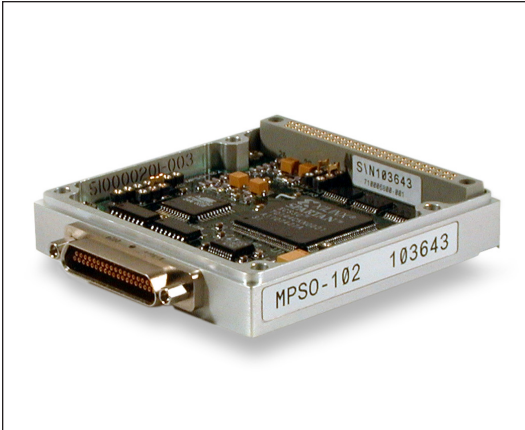

Applications

- Simultaneous Telemetry & Recording
- Drive Real-time Data Analysis
- Data Acquisition & Monitoring

Features

- 2 Programmable Secondary PCM Outputs per Module
- Each Output Contains all Composite Data or any Subset of the Composite Data
- Programmable Operation to 5 Mbps per Output
- Data/Clock Outputs Provided
 - Programmable NRZ-L or RNRZ-L
 - Single Ended (TTL) and RS-422
- Synthesized Output Clock Rates Proportional to the Amount of Data Steered to each Output
- Windows 95/98/NT/2000 Software Included

Description

The MPSO-102 module provides programmable secondary output capability to the MEDAU-2000 and MCDAU-2000 product families. The module can be used in master or stand-alone units and provides two (2) system PCM data stream outputs for display, analysis, telemetry or archive purposes. Each output can be programmed to contain all composite data or a subset of the composite data content. Outputs operate at programmable rates up to 5 Mbps. Data and clocks are provided in RS-422 (differential TTL) and TTL (single ended) formats.

Revision 05/12/2015

MPSO-102 Datasheet

©2015 Teletronics - A Curtiss-Wright Company
 Specifications subject to change without notice.
 Approved for Public Release 16-S-0729



CAIS
Compatible



Management
System
AS9100C
ISO 9001:2008

Teletronics - A Curtiss-Wright Company
 15 Terry Drive, Newtown, PA 18940
 phone: 267.352.2020 fax: 267.352.2021 Sales@ttcdas.com

www.ttcdas.com