


Voltage Excitation Module

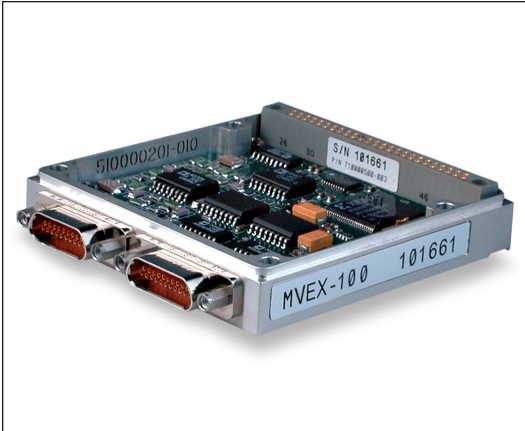

Applications

- Bridge Excitation

Features

- Constant Voltage Excitation
- +/- 0.3% of Full Scale accuracy
- Four individual excitation sources
 - Short circuit protection per source
- MVEX-100-1
 - Programmable output of 5 or 10 VDC
 - Up to 160 mA per source
- MVEX-100-2
 - Output of 10 VDC
 - Up to 240 mA per source
- Multiple MVEX-100's in a Single Unit
- Windows 95/98/NT/2000 Software Included

Description

The MVEX-100 module provides constant excitation to external bridges. The module contains four individual voltage sources and has five contact pairs (EXOUT and EXRTN) per source for wiring convenience. The MVEX-100-1 provides software programmable voltage outputs of 5 VDC and 10 VDC (programmable on a per source basis) and up to 160 mA current output per source. The MVEX-100-2 provides a fixed 10 VDC output at up to 240 mA current output per source.

Revision 05/13/2015

MVEX-100 Datasheet

©2015 Teletronics - A Curtiss-Wright Company
 Specifications subject to change without notice.

Approved for Public Release 16-S-1046



CAIS
Compatible



Management
System
AS9100C
ISO 9001:2008

Teletronics - A Curtiss-Wright Company
 15 Terry Drive, Newtown, PA 18940
 phone: 267.352.2020 fax: 267.352.2021 Sales@ttcdas.com

www.ttcdas.com