


## Avionics Standard Communications Bus Monitor Card

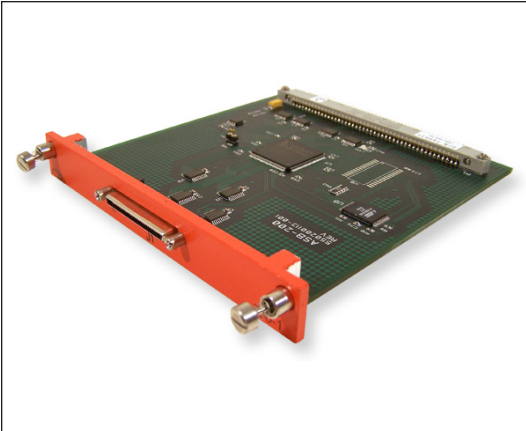

### Applications

- Avionics bus monitoring
- ASCB message storage
- ASCB message display

### Features

- Interface with PTI-2000 Telemetry Interface System
- Acquires ASCB Rev D avionics data
- Each data word includes 32-bits of data, 4 flag bits and 28 time-bits
- ASCB Rev D data is retrieved into the PCM under format control
- Message words are selectable for Class I PCM Transmission
- Multiple cards in a single chassis
- Windows software included

### Description

The ASB-200 card serves as a bus monitor for messages being transmitted on the Avionics Standard Communications Bus (ASCB) Version D. The ASB-200 communicates to the ASCB bus through the PTI-2000 Telemetry Interface System. All messages are stored in the PTI-2000 and retrieved under format control by this card.

Revision 06/14/2010

### ASB-200 Datasheet

©2010 Teletronics Technology Corporation  
Specifications subject to change without notice.



Teletronics Technology Corporation  
15 Terry Drive, Newtown, PA 18940  
phone: 267.352.2020 fax: 267.352.2021 Sales@ttcdas.com

[www.ttcdas.com](http://www.ttcdas.com)