


Multimode (SOQPSK + PCM/FM + ARTM CPM) Waveform Generator

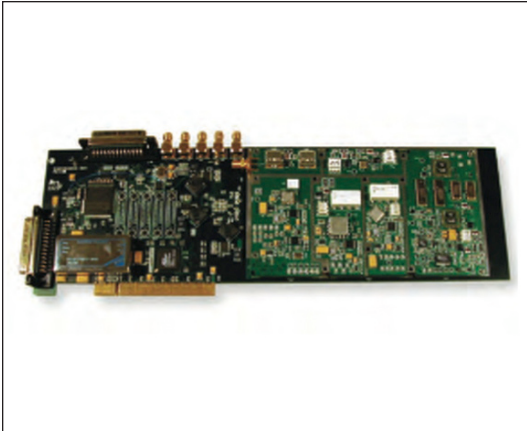

Applications

- Receiver/Demodulator Testing
- Ground Station Verification
- Simulation
- Training

Features

- Clock and Data Input
- I and Q Output
- Easily Interfaces to Common Vector
- Signal Generators
- All RCC 106-04 Modulations
- Available User Defined Modulation
- RCC 106 Randomizer Included

Description

The RF Networks part number MMWG-10155 is a PCI compliant board level implementation of highly integrated modulator baseband circuitry for PCM/FM, SOQPSK-TG and ARTM CPM. The PC based unit is intended for bench/ground testing, demonstration of ARTM modulation waveforms or as practical circuit availability for testing the various characteristics of an RF carrier modulated using these modulation methods. Generating and providing quadrature baseband signals, the unit is intended to interface with commercial Vector Signal Generators (VSG), such as the Agilent E4432B, among others. With the unit interfaced with a VSG, all ARTM-compliant modulation waveforms are provided at the center frequency of the VSG. For example, using the E4432B VSG allows any ARTM modulation to be generated at 20 MHz, 70 MHz, L- or Sband, thus covering test capability for demodulators as well as receivers. The modulation type and scrambler selection are set with Windows 2000/XP software provided. SMA connectors for clock, data and the output I- and Q- channel outputs are also located on the rear panel. The unit automatically adapts to the input rate and no user configuration is required.

Revision 08/26/2009

MMWG-10155 Datasheet

©2009 Teletronics Technology Corporation
Specifications subject to change without notice.



Teletronics Technology Corporation
15 Terry Drive, Newtown, PA 18940
phone: 267.352.2020 fax: 267.352.2021 Sales@ttcdas.com

www.ttcdas.com