

## 48 Cubic Inch Video Receiver




### Features

- L & S Bands
- IF Bandwidth to 4 MHz
- Frequency Selectable
- 4" x 6" x 2" Package
- Environmentally Rugged
- Available Options:
  - CCIR405 De-Emphasis
  - Selected Subcarrier Discriminator

### Applications

- Video Transmission
- Aircraft Flight Testing
- Missile Performance Testing
- Remote Ground Communication

**TRS-4830 Series Block Diagram**

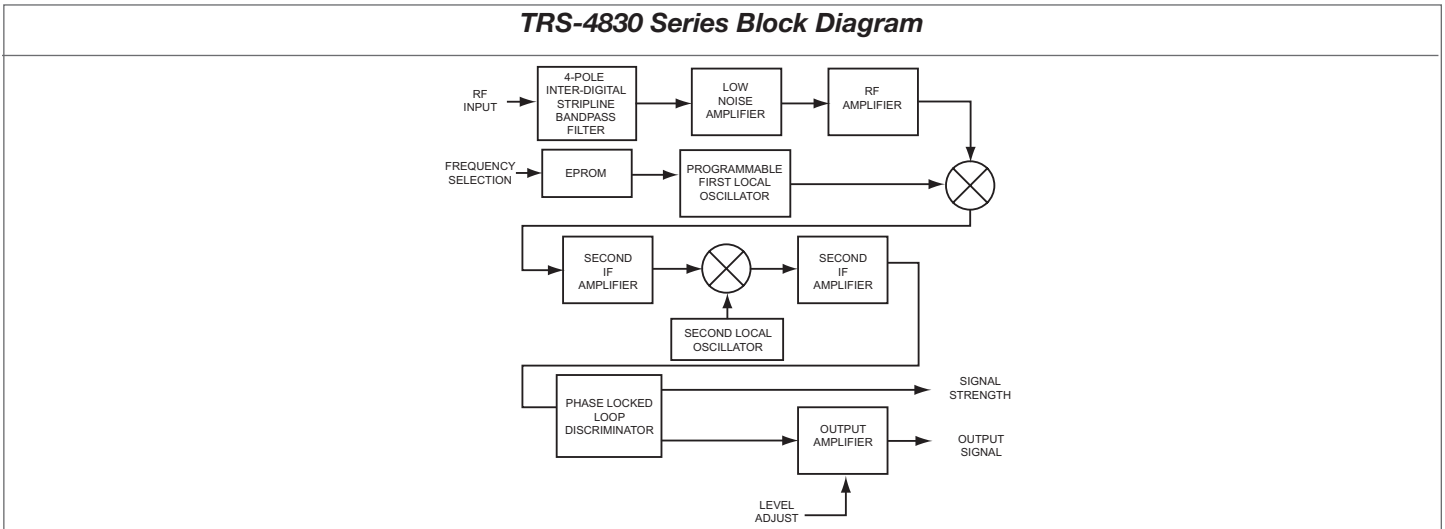

Revision 04/01/2009



### TRS-4830 Series Datasheet

©2009 Teletronics Technology Corporation  
Specifications subject to change without notice.

Teletronics Technology Corporation  
15 Terry Drive, Newtown, PA 18940  
phone: 267.352.2020 fax: 267.352.2021 Sales@ttcdas.com

[www.ttcdas.com](http://www.ttcdas.com)