

## 11 Cubic Inch Telemetry Transmitter - 2, 5, 10, or 20 Watts



### Features

- L & S Bands
- 2, 5, 10, or 20 Watt Power Output
- Frequency Selectable
- 2.5" x 3.5" x 1.31" Package
- Environmentally Rugged


### Description

TBD

### Applications

- Aircraft Flight Testing
- Missile Performance Testing
- Space Craft Instrumentation
- Remote Ground Communication

**TTS-11000 Series Block Diagram**

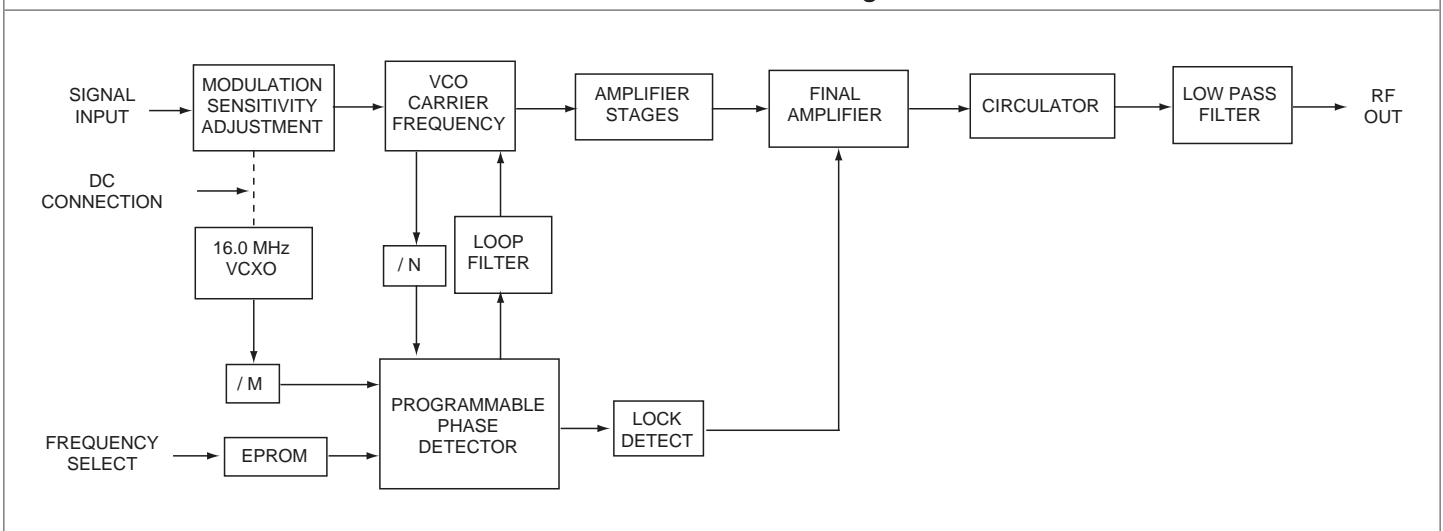

Revision 02/08/2010



Teletronics Technology Corporation  
15 Terry Drive, Newtown, PA 18940  
phone: 267.352.2020 fax: 267.352.2021 Sales@ttcdas.com

### TTS-11000 Series Datasheet

©2010 Teletronics Technology Corporation  
Specifications subject to change without notice.

[www.ttcdas.com](http://www.ttcdas.com)