

6 Cubic Inch Telemetry Transmitter - 2 or 5 Watts



Features


- L & S Bands
- 2 or 5 Watt Power Output
- Frequency Selectable
- 2" x 3" x 1" Package
- Environmentally Rugged

Description

TTS-6000 series transmitters are designed for use in multimode, telemetry, digital, wideband, and video applications. Versions are available to handle L and S bands at powers ranging from 2 watts to 10 watts. Compact package is just 6 cubic inches in size (2.0" x 3.0" x 1.0"). The transmitters are frequency selectable. Environmentally rugged construction for high reliability in the field.

Applications

- Video Transmission
- Aircraft Flight Testing
- Missile Performance Testing
- Space Craft Instrumentation
- Remote Ground Communication

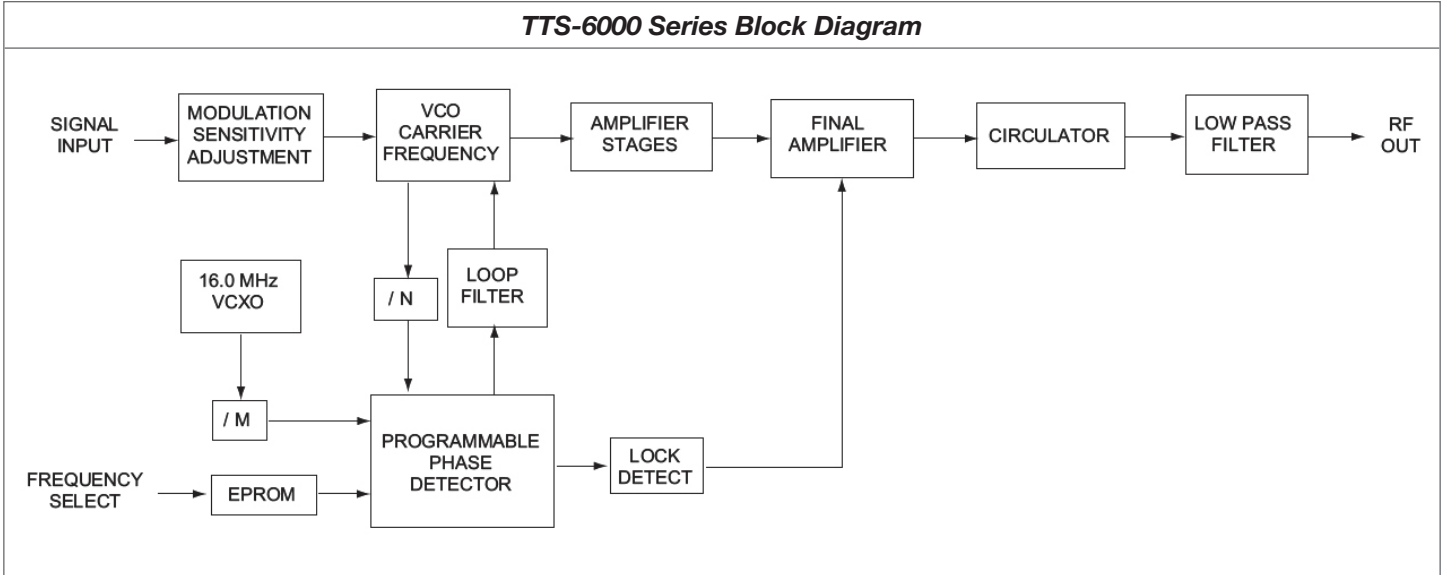

Revision 02/08/2010



Teletronics Technology Corporation
 15 Terry Drive, Newtown, PA 18940
 phone: 267.352.2020 fax: 267.352.2021 Sales@ttcdas.com